

## **TV-lift TS460**

## **Component specifications**

Metal sheet parts: St 37-2 Gear parts: St 70-2

Gear motor: CSE 24V 300047

Power supply: 100 W AC SMPS Power Transformer Consumption: 100 Watts; Standby: 0,01 Watts

Plastic components: PEHD, POM

Surface treatment: Visible metal parts powder coated in

"alu" colour.

Non visible metal parts are surface treated

(e.g. zinc plated)

Lifting capacity: 50 kg

Height: 64,5-110,5 cm


Depth: 4 cm Speed: 25 mm/sec


The electric components should be connected after mounting the lift.

All wires have DC jacks and since different types (size- male/female) have been used, only the correct connection can be made.

The mechanism can now be operated up and down using the supplied remote unit. Push "+" and the lift will expand.

All products come with an instruction manual.

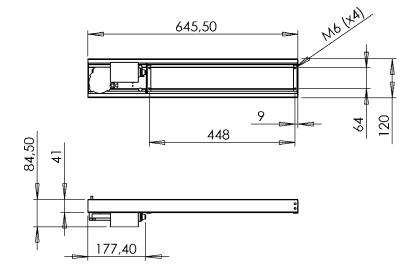
















## **Accessory for TS460: Monitor bracket MB460**



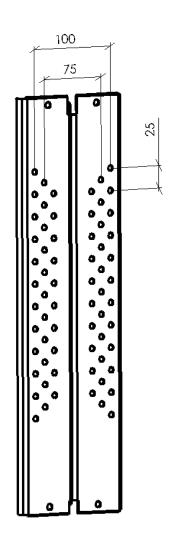

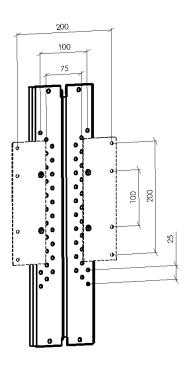

Plasma/LCD mounting bracket for use with TS460. Powder coated in RAL 9006 (alu-look). Weight capacity 50 kilos.

Fits Vesa std.:

50x50 75x75

100x100

200x100 200x200



